


Mono Half Cut

Monofacial
575~590W

SN(575~590)-156M

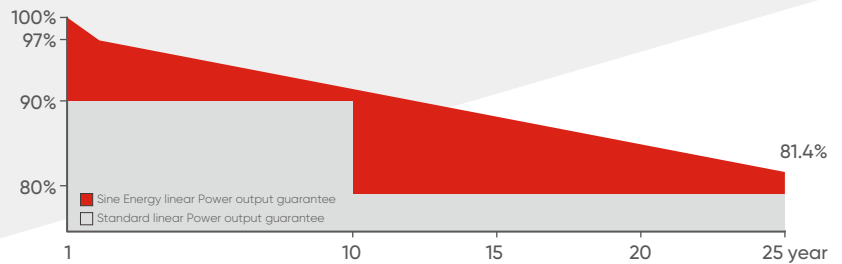

12 Years

Guarantee on product material and workmanship

25 Years

Linear power output warranty

Certification

IEC61215 | IEC61730 | IEC 61701 | CE | INMETRO

ISO 9001

2015 Quality Management System

ISO 14001

2015 Environmental Management System

ISO45001

2018 Occupational Health and Safety Management System



CE PID

Key Features

M10 wafer plus MBB half cut technology

Large-size cells increase the effective generation area, less current transfer distance & resistance, improve generation efficiency

High efficiency cells & high module yield

Adopt latest A grade high efficiency MBB cells, increase power generation & the rate of return on investment.

Twin panels parallel connection

12 cells strings array in twin parallel connection, lower panel temperature and hot spot, better shadow performance.

Optimal solar module size

Excellent industry size compatibility, suitable for ultra power plant & commercial projects, effectively reducing LCOE & transportation costs.

Stable generation capacity and power loss guarantee

0~+5W power output guarantee, 1st year power degradation 2%, 2nd year to 25th year power degradation 0.6%.

Excellent environmental adaptability and anti-aging ability

Excellent anti-PID ability, sand-dust, salt-mist, and ammonia resistance ability, 2400Pa wind load and 5400Pa snow load approved.

